




## KOMFORTEX® ELASTIC PAVERS / H-PAVER SURFACING SLAB

### SAFETY AND CONVENIENCE IN AN ATTRACTIVE DESIGN

The **KOMFORTEX® elastic pavers** and the **KOMFORTEX® H-paver surfacing slab** are ideal floor coverings for stable walkways, entrances to horse riding centres, paddock entrances and exits and tethering and washing areas. Both products are easy to install on unbonded and bonded subsurfaces. The **KOMFORTEX® H-paver surfacing slab** enables very fast installation and can be supplemented with our edge and corner profiles.


#### Technical data: Elastic pavers

<b>Material:</b>	Recycled rubber granules with rubber fibres bonded with MDI polyurethane
<b>Colours*:</b>	Red, green, black
<b>Product design:</b>	Surface: close-pored and smooth Edges: chamfered Underside: smooth, edges not chamfered
<b>Dimensions:</b>	Whole: 200 x 165 x 43 mm Half: 100 x 165 x 43 mm Beginner: 200 x 135 x 43 mm
<b>Dimension tolerances**:</b>	Length/width: $\pm 0,8 \%$ , Thickness: $\pm 2 \text{ mm}$ Weight: $\pm 0,05 \text{ kg}$
<b>Weight:</b>	Whole: ca. 1.00 kg/piece, Half: ca. 0.50 kg/piece Beginner: ca. 0.95 kg/piece

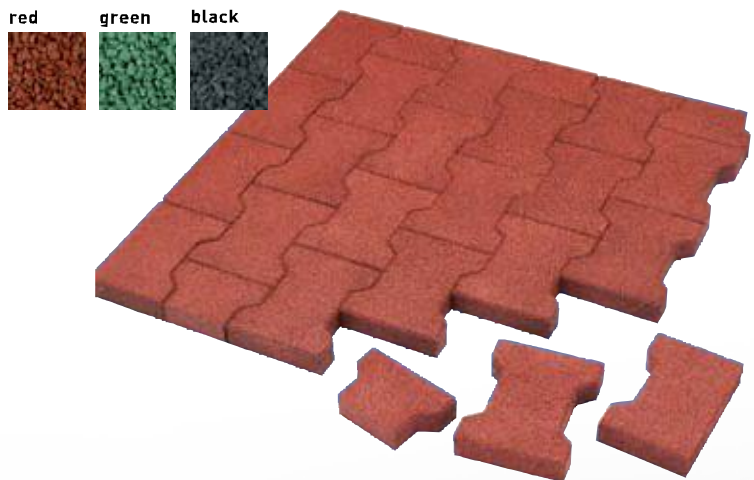

#### Technical data: H-paver surfacing slab

<b>Material:</b>	Recycled rubber granules bonded with MDI polyurethane
<b>Colours*:</b>	Red, green, black or grey
<b>Product design:</b>	Surface: open-pored H-shaped brick look Underside: half-round knobby profile Edges: chamfered
<b>Dimensions:</b>	Length x width x thickness 500 x 500 x 40 mm
<b>Dimension tolerances**:</b>	Length/width: $\pm 0,8 \%$ Thickness: $\pm 2 \text{ mm}$
<b>Weight per unit area:</b>	36.0 kg/m²

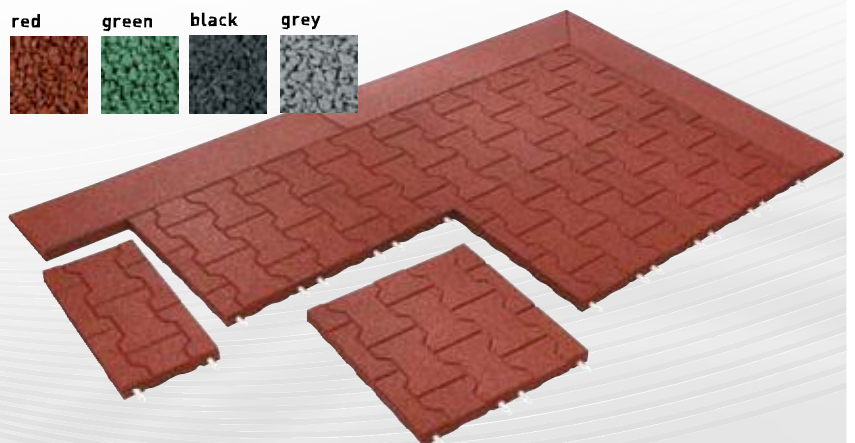

\* slight deviations in colour are possible due to differences in material

\*\* dimension tolerances according to DIN 7715, Part 2, Class M